

CALLÍERT INSTRLLATION MANUAL

18-25 JEEP WRANGLER JL 10th Anniversary Skid Plate



CAUTION BEFORE INSTALLING

Before installation - Read and understand all instructions, warnings, cautions, and notes contained in this installation instruction guide. Consult your vehicle owner's manual for proper disconnection of electrical and lifting of vehicle if required for installation of this product.

This install may require some technical skills and knowledge of basic mechanical work. If you do not feel that you are capable of performing this install please take this product to a trained professional.

After reading this guide please contact us with any questions or concerns before installing product. E-mail: tech@calliert4x4.com

CALLIERT is not responsible for any bodily injury or harm to you or your vehicle as a result of an improper install.

Proper installation of this kit requires knowledge of the factory recommended procedures for removal and installation of original equipment components. We recommend that the factory shop manual and any special tools needed to service your vehicle be on hand during the installation. Installation of this kit without proper knowledge of the factory recommended procedures may affect the performance of these components and the safety of the vehicle.


· Always wear eye protection when operating power tools. ·

Inspect all contents of this package to make sure product is not damaged and all installation hardware has been included. If parts are missing from kit, please be prepared to provide the following information:

Name of purchase location

Bar Code on side of box



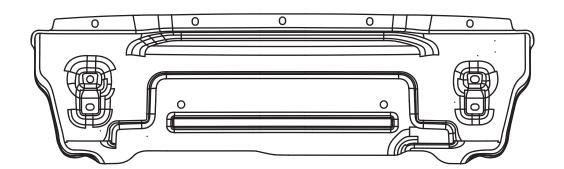

Skid Plate





Bracket



×6

M10 x 25mm Button Head Hex Socket Bolt

b. @

×6

M10 x 25 x 2mm Washer



×2

M8 Hex Flange Nut



×3

M8 U-nut Clip



×5

M8 x 20mm Button Head Hex Socket Bolt



×5

M8 x 16 x 1.5mm Washer



M10 Hexagon Rivet Nut





Prepare the required parts (g^*4) . As shown in the diagram, secure g to the frame rails using a pneumatic rivet gun.






Prepare the required parts (a*4, b*4, 2*2). As shown in the diagram, secure 2 to the frame rails using a and b at the holes of g.





Prepare the required parts (d*3). As shown in the diagram, install d at the red-circled holes.



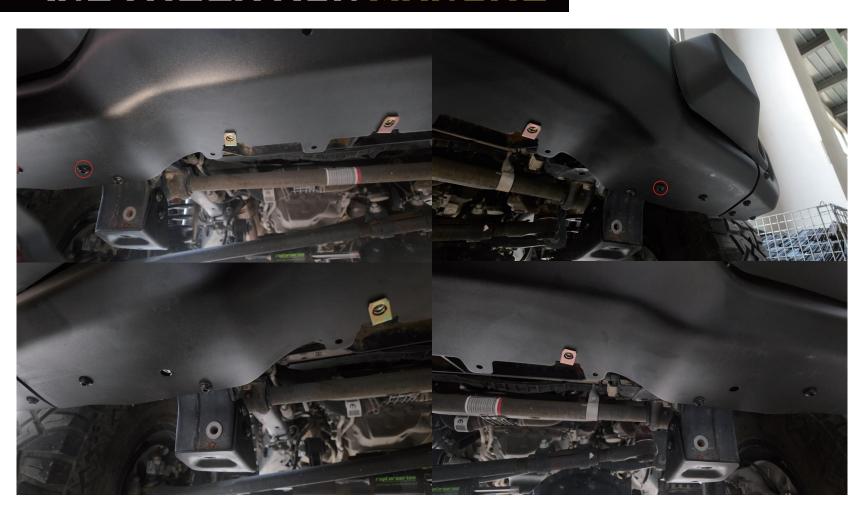

As shown in the diagram, remove the screws at the red-circled stress points on the bumper.





Prepare the required parts (a*2, b*2, c*2, e*5, f*5, $\boxed{1}$ *1). As shown in the diagram: At the red circles, connect $\boxed{1}$ to the bumper using e and f At the blue circles, connect $\boxed{1}$ to the bumper using c, e, and f At the yellow circles, connect $\boxed{1}$ and $\boxed{2}$ using a and b.

Installation Completed

