

07-18 JEEP WRANGLER JK Front Half Door



CAUTION BEFORE INSTALLING

Before installation - Read and understand all instructions, warnings, cautions, and notes contained in this installation instruction guide. Consult your vehicle owner's manual for proper disconnection of electrical and lifting of vehicle if required for installation of this product.

This install may require some technical skills and knowledge of basic mechanical work. If you do not feel that you are capable of performing this install please take this product to a trained professional.

After reading this guide please contact us with any questions or concerns before installing product.
E-mail: tech@calliert4x4.com

CALLIERT is not responsible for any bodily injury or harm to you or your vehicle as a result of an improper install.

Proper installation of this kit requires knowledge of the factory recommended procedures for removal and installation of original equipment components. We recommend that the factory shop manual and any special tools needed to service your vehicle be on hand during the installation. Installation of this kit without proper knowledge of the factory recommended procedures may affect the performance of these components and the safety of the vehicle.



- **Always wear eye protection when operating power tools.** •

Inspect all contents of this package to make sure product is not damaged and all installation hardware has been included. If parts are missing from kit, please be prepared to provide the following information:


- Name of purchase location
- Bar Code on side of box

INSTALLATION MANUAL

1 Half Front Door

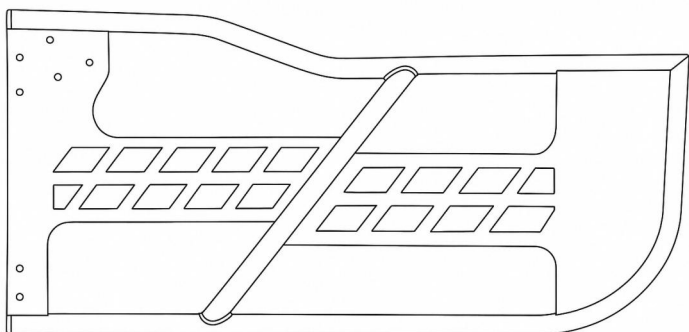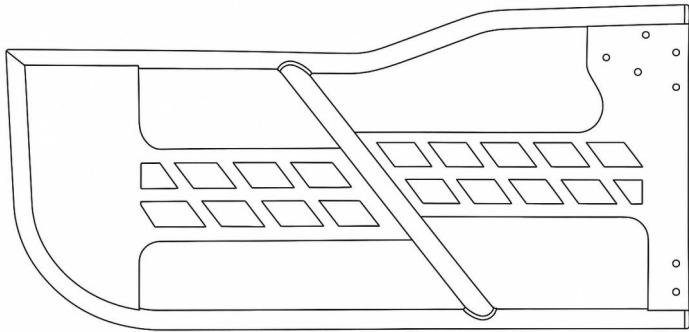


2

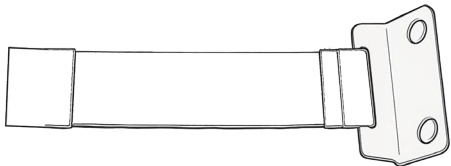

x2

Half Stop Rope

3



x4

Long Hinge

a.



M8 x 20mm
Button Head Hex Socket Bolt

x8

b.



M8x20mmx1.5mm
Washer

x8


c.



M8
Hex Flange Nut

x8

INSTALLATION MANUAL

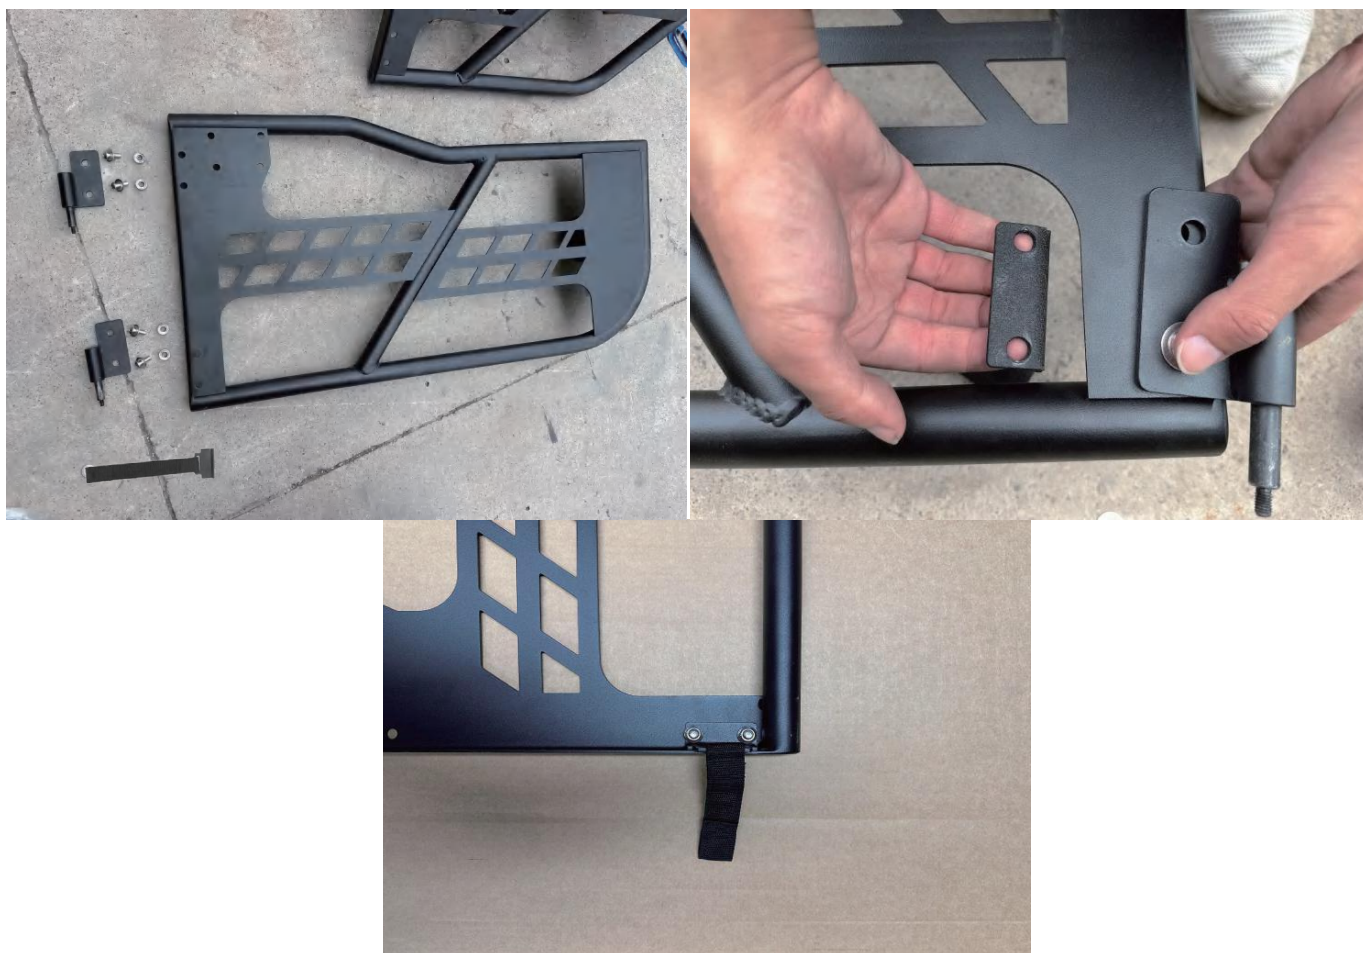

Prepare required components (①*1, ②*1, ③*1, ④*1, a*4, b*4, c*4) ,
as shown in the diagram, connect ① and ③ using a, b, c (upper hinge),
and connect ①, ②, ③ using a, b, c (lower hinge).
(Note: do not tighten screws completely).

INSTALLATION MANUAL



Mount the door to the vehicle body,
close the door, fully tighten the screws,
use original vehicle screws to secure the hinge,
and fix the limiter strap inside the vehicle.

INSTALLATION **MANUAL**



Installation complete.

CALLIERT